

# GALVANIZED & STAINLESS STEEL





Phone: 07 3624 0300 Email: sales@rodneyind.com.au Web: www.rodneyind.com.au



### FOR QUALITY, RANGE AND VALUE, Choose rodney industries

For more than 35 years we at Rodney Industries have been supplying the Australian market with Footvalves.

The Rodney Industries footvalves are designed to offer years of trouble free service with their galvanized, stainless steel or polyethylene construction.

Footvalves are used to prevent reverse flow and to maintain prime within the pump when fitted to the foot or end of the suction pipe of the pump set.


The main components of the footvalve consist of body, flap, seat and strainer.

The swing flap pivots freely on the hinge blocks. Its movement is restricted with stops preventing damage to the inside walls of the valve.

A durable EPDM seal is fitted to the flap for reliable service and the flap assembly is of a self levelling design to allow for wear within the seal.

A quick release lever is fitted to the valve and can be remotely activated by a cable to release the water within the valve.





## **OFFERING THE COMPLETE PACKAGE**

Spare parts are readily available for our complete range of Footvalves; from the basket, all the way to the clack rubber.







## **OUR FOOTVALVES**

We understand the importance of quality, durability and performance and that is why we offer such a range of Footvalves designed to offer years of trouble free service.

# **GALVANIZED**



Looking for an inexpensive footvalve option where quality and reliability are still key features? Look no further than the Rodney Industries' range of galvanized Footvalves.

Available from 3 inches right through to 26 inches and boasting extremely efficient flow characteristics through the entire range, our Galvanized Footvalves set the industry standard.



Does your project require the benefits of Stainless Steel? Strong, durable and corrosion resistant? Look no further than our range of Stainless Steel 316 Footvalves available in 3 inches through to 26 inches.

Apart from the Footvalve's Clack Rubber, all components are manufactured using Stainless Steel - even the fastenings!

#### THE 'FAB' ONES






Need something a little different? With our knowledge and experience, you can be sure we can fabricate the footvalve for your needs.

ALSO AVAILABLE IN POLY

# **SPECIFICATIONS**

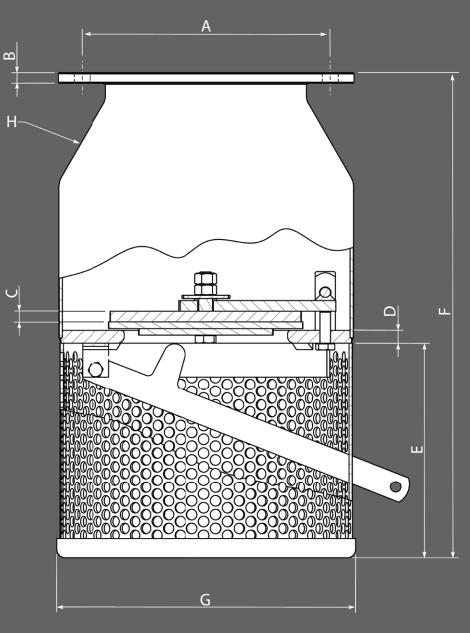

Size		А	В	С	D	E	F	G	Н	Weight
mm	inches	mm	mm	mm	mm	mm	mm	mm	mm	approx kgs
80	3	146	10	10	12	178	372	188	3	10
100	4	178	10	10	12	178	393	220	3	11.7
125	5	210	10	10	12	203	448	258	3	16.2
150	6	235	10	10	12	203	459	283	3	18.5
175	7	260	10	10	12	230	500	310	2	20
200	8	292	12	12	16	278	595	340	3	30
225	9	324	12	12	16	280	610	373	2	36
250	10	356	12	12	16	312	676	405	3	42
300	12	406	12	12	16	364	776	455	3	53
350	14	470	16	16	20	408	897	525	3	82.5
375	15	495	16	16	20	432	920	550	2	86.5
400	16	521	16	16	20	470	975	585	2	98.4
450	18	584	20	20	25	505	1105	645	3	139
500	20	641	20	20	25	555	1180	710	3	178
600	24	756	20	20	25	665	1390	830	3	246
660	26	813	20	20	25	725	1510	875	3	280
750	30	927	25	20	32	820	1660	995	6	500

Please note weights and dimensions are to be used as a guide only. Contact Rodney Industries or your local distributor for more detailed specifications.

